

SBS®X-75A 6 Position Assembly Instructions

Notes: For easiest construction it is recommended to not strip or crimp wires onto cable until after step 1. Should customer choose to crimp contacts and insert contacts on wires through grommet during installation, grommet should be inspected for any damage that may have occurred during installation to both external and internal ribs. Silicone debris left on wire and external tears or cracks on the grommet are clear indicators of damage. Damaged grommets should be discarded and replaced as a water-tight seal cannot be ensured if damage to grommet has occurred.

Step 1

Strip 2.85" of the outer jacket exposing inner jacket wires for power and signal (see figure 1). Slip grommet over the inner wire cables for both power and signal wires. The 6 signal cable should go through the middle hole in the grommet, with power cables on either side. Slide down far enough for wires to be fully inserted into housing; approximately 3.0" [118 mm]. It is recommended to have the signal cable cut 0.200" to 0.300" [5.1 to 7.6 mm] longer than the power wire to eliminate strain on the signal positions should the wires go under tension.



Figure 1

Step 2

Cut 0.33" off the power wires. Strip power wires and signal cable/wires. Ensure wires are stripped enough for completed insertion into contact crimp barrels (see table A, figure 2).




Table A: Cable Stripping Dimensions

Connector Series	Contact Type	"X"		NOTE
		Inches	mm	
SBS®X-75A 6-AUX	Outer Jacket	2.85	72.4	
	Power	0.56	14.0	< .380" Outer Diameter Wire
	Power	1.1	27.9	≥ .380 Outer Diameter Wire
	Aux Cable	1.38	35.1	All cable jackets
	Aux Pin	0.24	6.1	
	Aux Socket	0.24	6.1	



Figure 2

Step 3

Crimp both power and signal contacts onto wires using the appropriate crimping tooling (see table B & C, figure 3).

- a. Make sure to crimp signal contacts in the same orientation that your signal housing will be. Signal housing is intended for use with three pin contacts on top and three socket contacts on bottom.
- b. Refer to crimp document 1S6848, SBS@X-75A Crimp Specification as reference to determine crimp quality for power contacts. Reference 1S6543, Assembly Instructions for PPMX Specification.

Table B: Power Contacts Listed for Use with Connector Series

Contact Part Number	Wire Size	Crimp Tool
1339G4	4 AWG - (25 mm ²)	1387G1 pneumatic tool + 1388G7 die + 1389G9 locator
1339G2	6 AWG - (16 mm ²)	1309G4 hand tool <i>or</i> 1387G1 pneumatic tool + 1388G6 die + 1389G9 locator
1339G5	8 AWG - (10 mm ²)	1309G4 hand tool <i>or</i> 1387G1 pneumatic tool + 1388G6 die + 1389G9 locator
1339G3	10 to 12 AWG - (2.5 to 6 mm ²)	1309G4 hand tool <i>or</i> 1387G1 pneumatic tool + 1388G7 die + 1389G9 locator

Table C: Auxiliary Contacts Listed for Use with Connector Series

Contact Part Number	Wire Size	Crimp Tool
4803G3	24 to 20AWG - (0.5 to 0.25 mm ²)	PM1000G1 hand tool <i>or</i> TP0001 pneumatic tool + TL0005 locator
4802G3	24 to 20AWG - (0.5 to 0.25 mm ²)	PM1000G1 hand tool <i>or</i> TP0001 pneumatic tool + TL0005 locator

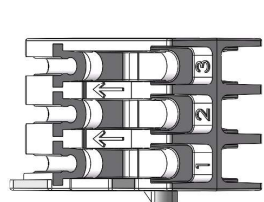


Figure 3

Step 4

Orient cable so the three pin contacts are in line with the top of the connector with arrows facing outward (see positions 1,2,3) and the three socket contacts are on the bottom (see positions 4,5,6). Take 3 pins and place them in their appropriate slots on top of the signal holder (see figures 4a, 4b, 4c). Take 3 sockets and place them in their appropriate slots on bottom of the signal holder (see figures 5a, 5b). Contacts once installed should appear as shown in Figure 6.

Pin Shoulder Sits Inside Groove



Positions 1,2,3

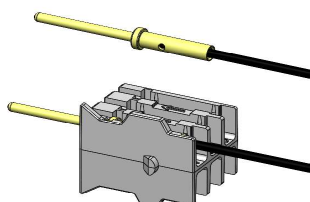


Figure 4a

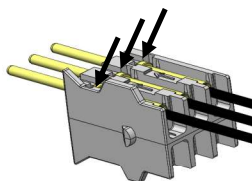


Figure 4b


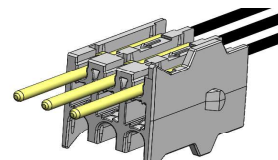


Figure 4c

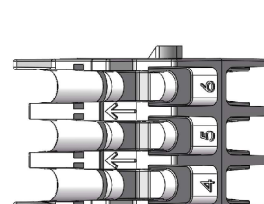

Positions 4,5,6

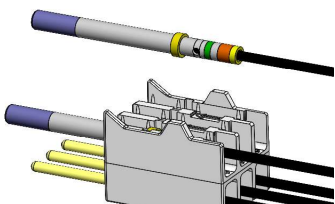


Figure 5a

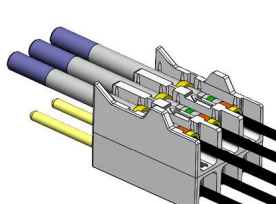


Figure 5b


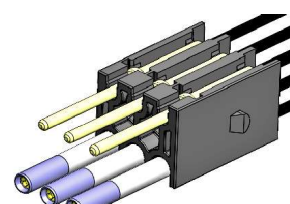


Figure 6

Step 5

Slide the signal holder assembly into the signal housing until it locks in place (see figures 8 & 9).

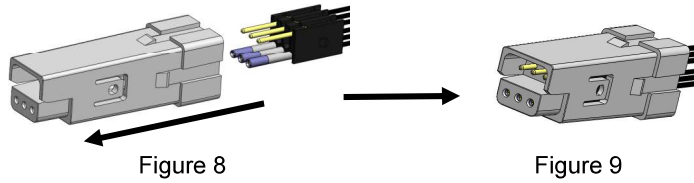

Step 6

Load both power contacts and signal housing into the main connector body, starting with signal housing and then the power contacts (see figure 10). Ensure both power contacts are fully seated on their respective springs and the signal housing is completely latched into place (see figure 11).

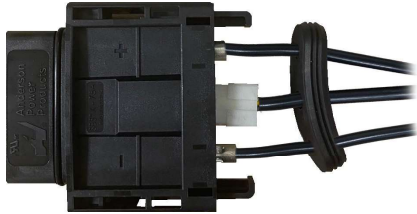


Figure 10



Figure 11

- There are four keying positions the signal housing can be placed in as noted by hood position and direction of arrow on rear of housing (up, down, left, and right). Each position will key the connector so it will only mate with other connectors with the same signal housing orientation.
- Note that the signal housing must be in the same orientation when placed vertically (either up or down) or placed opposite when placed horizontally (left or right) to mate properly.
- If the signal housing is inserted incorrectly, when trying to mate, you may use the Signal Housing Extraction Tool #116081P1 to remove the housing. To remove the signal housing, start by training the signal cable down or up so it is out of the way. Using the Signal Housing Extraction Tool, compress the tool and place prongs into the grooves on either side of the signal holder. Push the tool forward until a positive stop is reached, the tool will have wedged beneath the internal latches (see figure 12). Release compression to allow the tool to lift the internal latches. Gently push on the front of the signal housing to extract the housing (see figure 13).



Figure 12



Figure 13

Step 7

For In line assemblies, slide the grommet up the wires to the rear of the connector housing (see figure 14). Apply even pressure to the grommet to push grommet until it is seated fully into the sealing cavity. Note grommet will be tight fitting to ensure proper sealing. Check to ensure the grommet is completely inserted evenly all around with the grommet being flush or sub-flush to the rear of the housing (see figure 15). If you feel the pressure required is too high, apply additional silicone-safe lubrication to the grommet.



Figure 14



Figure 15

Step 8

Fastened cable clamps onto wires, by alternating evenly to alleviate skewing. Screws are torqued to 6 in-lb [0.68 N-m]. Ensure cable clamps are snug to the power wire jackets (see figure 16).



Figure 16

Step 9

Check the assembly to ensure signal housings are oriented correctly. Mate the connector up to 5 times to check all components are seated correctly and do not move around within the connector.

IP68 Protection—Unmated

Anderson strongly recommends the usage of covers when connectors are not mated to maintain IP68 protection.

Tether connectors covers to the housings, first pull through geometry on the housings. Then pull cover through loop on end of cord. Finally, pull tight to secure cord loop around connector. (See figure series 15 & 16) for example process. For panel mount assemblies simply replace a mounting O-ring with tethered grommet. (See figure series 17) for example process.

Figure Series 15



Figure Series 16



Figure Series 17



All Data Subject to Change Without Notice 2023-0001 1S6869 Rev 1 **Your Best Connection™**

Anderson™ will use reasonable efforts to include accurate and up-to-date content in the assembly instruction. All product information contained in the instruction sheet including ordering information, illustrations, specifications, and dimensions, are believed to be reliable as of the date of publishing, but is subject to change without notice. Anderson™ makes no warranty or representation as to its accuracy. Content in the instruction sheet may contain technical inaccuracies, typographical errors and may be changed or updated without notice. Anderson™ may also make improvements and/or changes to the products and/or to the programs described in the content at any time without notice. Current sales drawings and specifications are available upon request.

© 2023 Anderson Power Products, Inc. All rights reserved. A®, Anderson Power Products®, SBS® are registered trademarks of Anderson Power Products, Inc. Anderson™, Anderson Power™, Anderson Power™ Logo and Your Best Connection™ are trademarks of Anderson Power Products, Inc.



HEADQUARTERS: Anderson Power Products®, 13 Pratts Junction Road, Sterling, MA 01564-2305 USA T:+1 978-422-3800 F:+1 978-422-0128 • **EUROPE:** Anderson Power Products® Ltd., Unit 3, Europa Court, Europa Boulevard, Westbrook, Warrington, Cheshire, WA5 7TN United Kingdom T: +44 (0) 1925 428390 F: +44 (0) 1925 520203 • **ASIA / PACIFIC:** IDEAL® Anderson Asia Pacific Ltd., Unit 922-928 Topsail Plaza, 11 On Sum Street, Shatin N.T., Hong Kong T:+(852) 2636 0836 F: +(852) 2635 9036 • **CHINA:** IDEAL® Anderson Technologies (Shenzhen) Ltd., Block A8 Tantou Western Industrial Park, Songgang Baoan District, Shenzhen, PR. China 518105 T: +(86) 755 2768 2118 F: +(86) 755 2768 2218 • **GERMANY:** IDEAL® Industries Germany GmbH, Esslinger Strasse 7, D – 70771 Leinfelden-Echterdingen, T: +49 (0) 711 – 997606666 • **INDIA:** IDEAL® INDUSTRIES India Private Limited, 229-230, SPAZEDGE, Tower B, Sector 47, Sohna Road, Gurgaon – 122018, Haryana, India T: +(91) 956-0075905 T: +(91) 124-4495101 • www.ideal-industries.in • www.andersonpower.com